


## Protective Grating Openable VKR-O

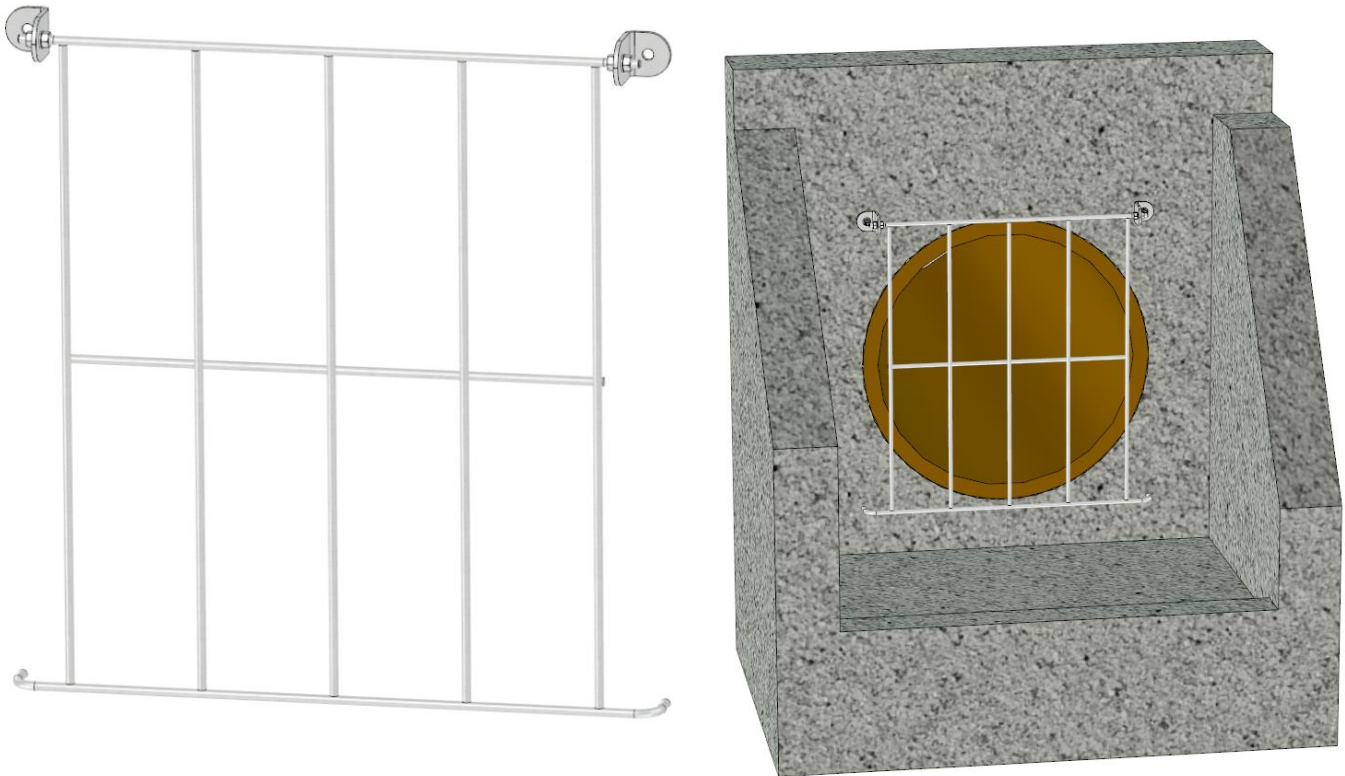

### DESCRIPTION:

VKR protective gratings are used wherever it is necessary to protect the pipeline outlet against access by people and animals or protect equipment downstream from solids. Mainly used at the outlets of rainwater drainage collectors. Available in round and rectangular versions.

### MATERIALS:

Welded construction made of stainless steel, e.g. AISI 304/304L - 1.4301/1.4307, acid-resistant AISI 316/316L - 1.4401/1.4404, galvanized or painted carbon steel, or any other, depending on customer requirements and mounting conditions.

### MOUNTING:

Gratings mounted to the wall using adhesive or expansion anchors.


### ADDITIONAL OPTIONS:

A number of additional options are available, such as closing spring, key lock, etc.

### DOCUMENTATION:

Standard documentation delivered with the delivery includes: the national declaration of performance, technical and operational documentation along with the operating and assembly instructions. On request, we provide material certificates, welding documents and other according to the customer's needs.

**STANDARD DIMENSIONS:**

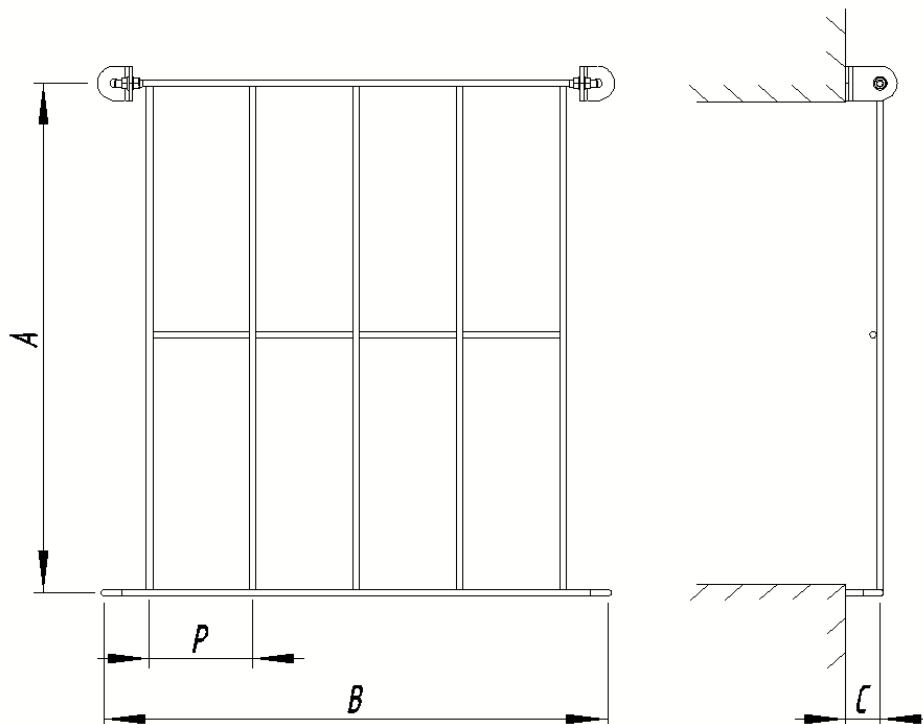

Type	Height A [mm]	Width B [mm]	Thicknes C [mm]	Spacing P [mm]
VKR-O 200	200	200	50	150
VKR-O 250	250	250	50	150
VKR-O 315	315	315	50	150
VKR-O 400	400	400	50	150
VKR-O 500	500	500	50	150
VKR-O 600	600	600	50	150
VKR-O 730	730	730	50	150
VKR-O 800	800	800	50	150
VKR-O 1000	1000	1000	50	150

\*Other sizes available on individual request. It is possible to make gratings of any size and bar spacing.